

9000 ± 300



Electrical Properties

1. It shall be not have any open/short, miswiring and intermittent failures.
2. The cable shall be 100% electrical test.
3. Voltage test : DC 300V; Insulation resistance : 5.0M ohm/Min ; Conductance resistance : 5.0M ohm/Max;

Machinery Character :

1. All dimension are "mm" except specified.
2. The cable should be clean, free of oil/d/Flash/burred.
3. Cable Ass'y shall be Rohs Compliant.

6	Shell : Lightning ABS Shell, Color : White / WH01-A	Pcs	1
5	Shell : USB AM ABS Shell, Color. White / WH01-A	Pcs	1
4	TPE : 4SP TPE Color : White / WH01-A	G	4
3	P2. Connector : USB A Male, Pin G/F	Pcs	1
2	P1. Connector : 8Pin Lightning Male (C48)	Pcs	1
1	Cable : 30AWG(19/0.05TC+250D)*1P+24AWG(26/0.1TC+250D)*1C+AL/WV +DV(19/0.05TC+250D)*3C+Braided, DD=2.6 ± 0.15mm Jacket TPE, Color White	Pcs	1
Item	Description	UNIT	QTY

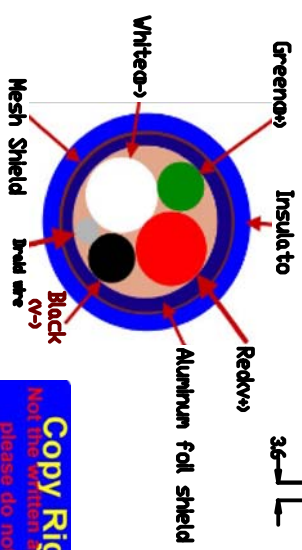

PIN OUT		Color
1	---	Red(V+)
3	XXX	White(D-)
2	---	Green(D+)
4	---	Black(V-)
S	---	DV+Braided

Copy Right
Not the written agreement
please do not copy
Shun Qi Shi
All Rights Reserved. (11/20/2013) Request



Vaster SKU : 83578-WH-1M

Description : Vaster iPhone iPad Pod 8Pin Lightning USB Sync & Charging Cable	
Designed By : Shun	Date: 05-20-2014
UPC Code : 670561 808010	Client :
Audit:	Date:
Approved	Date:
Sheet : Letter	Rev : A
Drawing No : VTY20140520-IPC	

Cable Specialists & MFG (USA) Inc

